




Phonak Virto M-Titanium (M90/M70) (M)

Call
Absolute Hearing Solutions
For Hearing Aid Deals
614-452-4280


0.4 cm³ coupler data

FRYE CIC coupler

Output sound pressure level

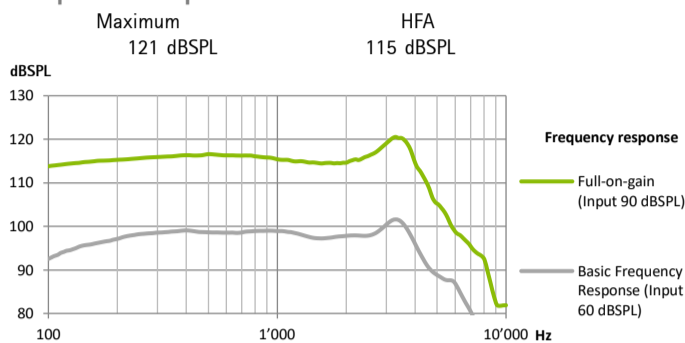

Acoustic gain

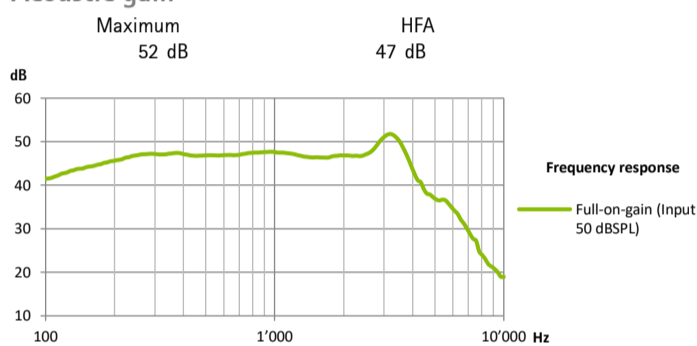


Frequency range	<100 Hz - 7300 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.5%	1.0%	1.0%
Battery current	1.0	mA		
Equivalent input noise level	19	dB SPL		

2 cm³ coupler data


www.absolutehearing.com

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

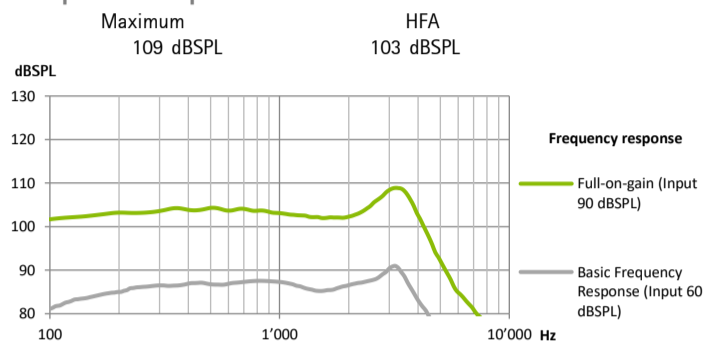


Acoustic gain

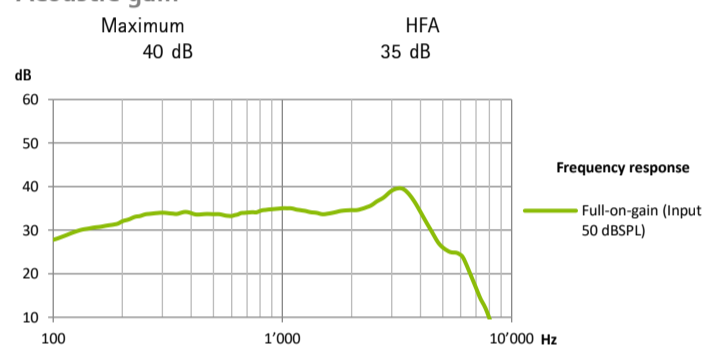

Frequency range	<100 Hz - >7000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.5%	1.0%	1.0%
Battery current	1.0	mA		
Equivalent input noise level	19	dB SPL		

Induction coil sensitivity

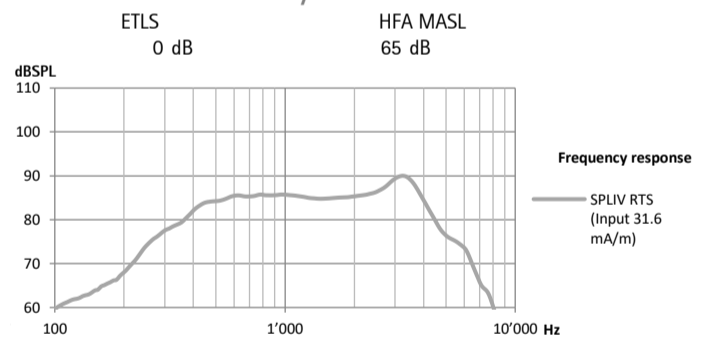

General test information

- Supply voltage 1.3 V / impedance 6.2 Ω
- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- Unless otherwise specified, all data obtained are measured with 5 mm tubing and Phonak Target measurement settings
- The 0.4 cm³ coupler data is used as additional information which is more close to the real application, as the deep insertion leads to a significantly smaller residual volume in front of the ear drum



WARNING: Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted. Such changes may damage the ear or the hearing aid.



Sonova AG · Laubisrütistrasse 28
CH-8712 Stäfa · Switzerland
www.phonak.com

A Sonova brand

PHONAK
life is on




Phonak Virto M-Titanium (M90/M70) (P)


0.4 cm³ coupler data

FRYE CIC coupler

Output sound pressure level

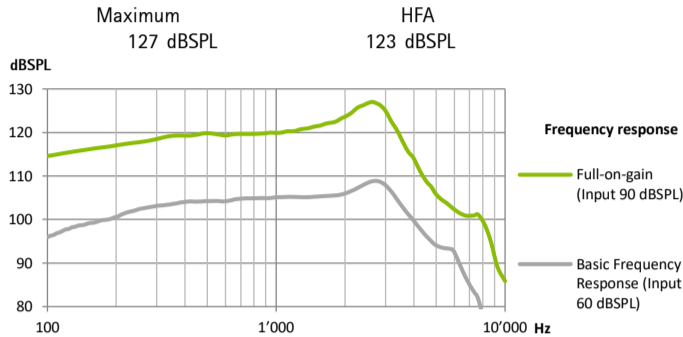

Acoustic gain

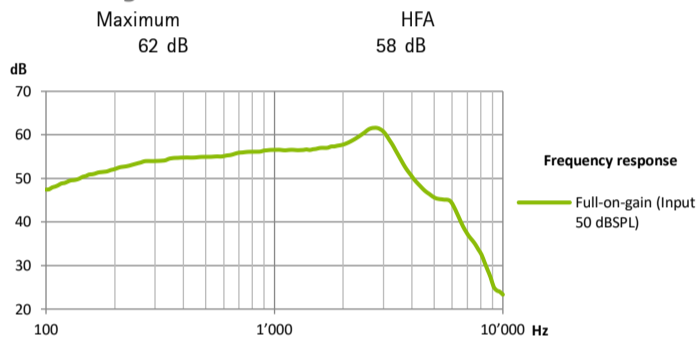


Frequency range	<100 Hz – 6800 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.0%	1.0%	1.0%
Battery current	1.0	mA		
Equivalent input noise level	19	dB SPL		


2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

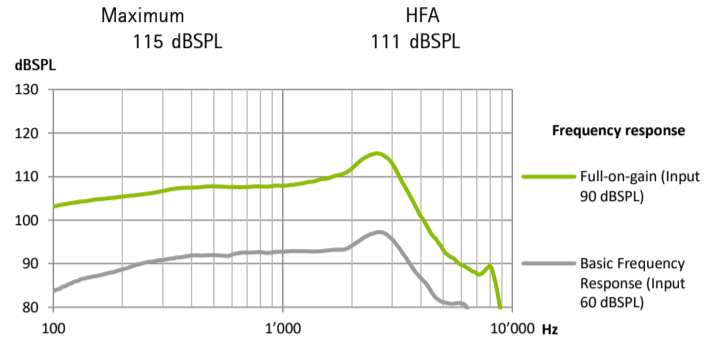


Acoustic gain

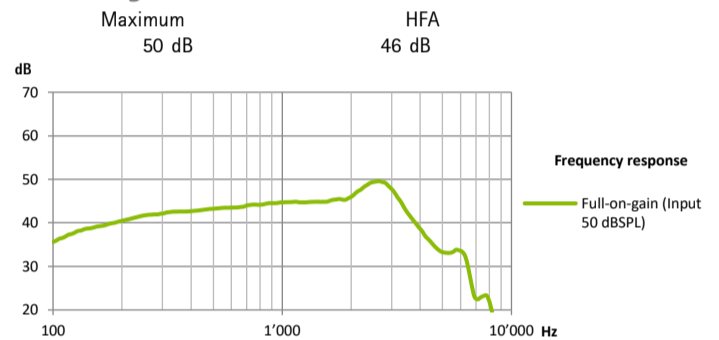

Frequency range	<100 Hz – 6700 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.0%	1.0%	1.0%
Battery current	1.0	mA		
Equivalent input noise level	19	dB SPL		

Induction coil sensitivity

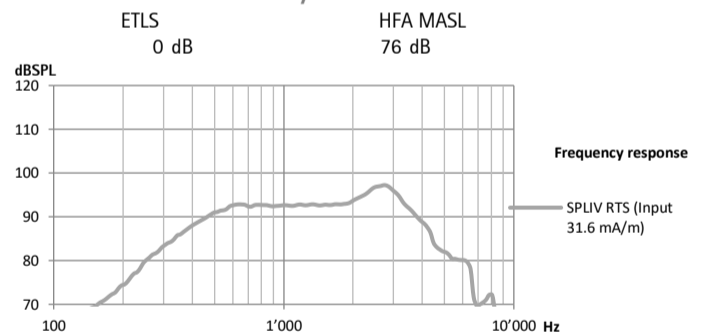

General test information

- Supply voltage 1.3 V / impedance 6.2 Ω
- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- Unless otherwise specified, all data obtained are measured with 5 mm tubing and Phonak Target measurement settings
- The 0.4 cm³ coupler data is used as additional information which is more close to the real application, as the deep insertion leads to a significantly smaller residual volume in front of the ear drum



Sonova AG · Laubisrütistrasse 28
CH-8712 Stäfa · Switzerland
www.phonak.com

A Sonova brand






Phonak Virto M-Titanium (M90/M70) (SP)


0.4 cm³ coupler data

FRYE CIC coupler

Output sound pressure level

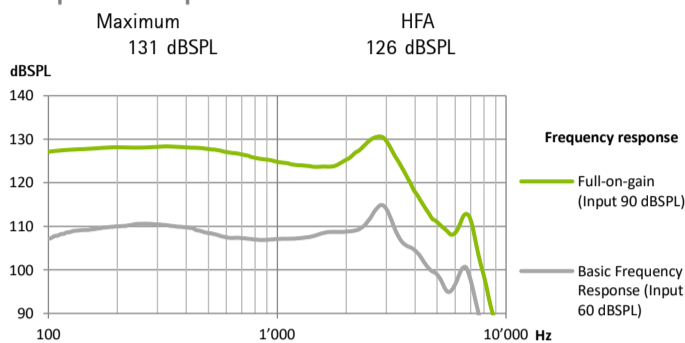

Acoustic gain

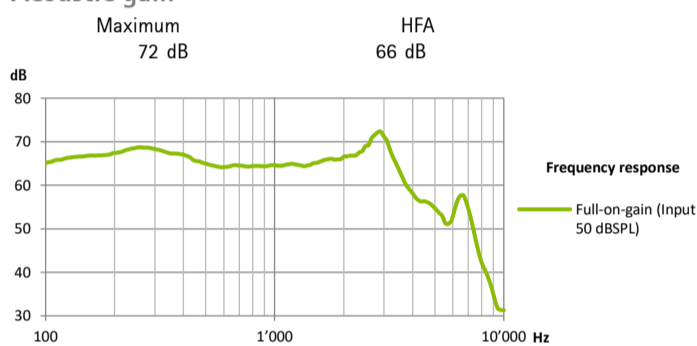


Frequency range	<100 Hz - 7700 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.0%	1.0%	1.0%
Battery current	1.0	mA		
Equivalent input noise level	19	dB SPL		


2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

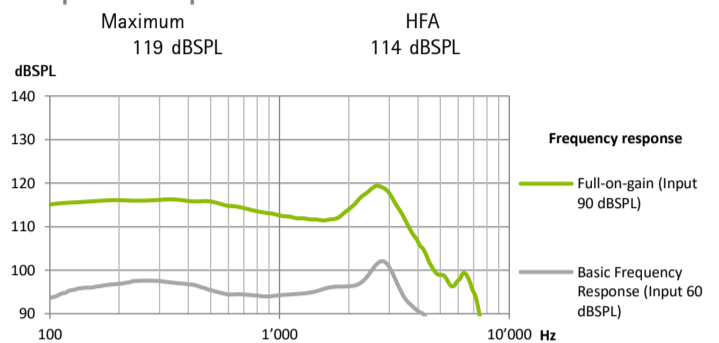


Acoustic gain

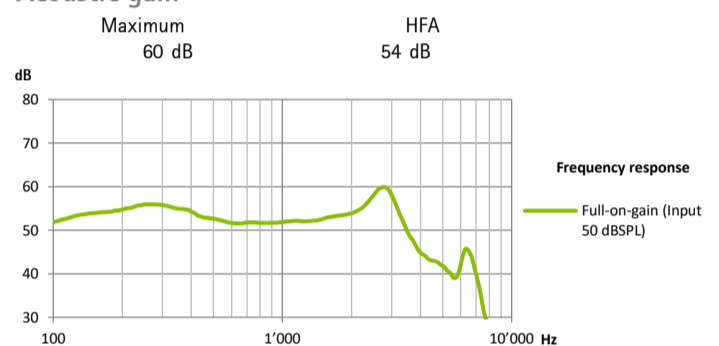

Frequency range	<100 Hz - 7000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.0%	1.0%	1.0%
Battery current	1.0	mA		
Equivalent input noise level	19	dB SPL		

Induction coil sensitivity

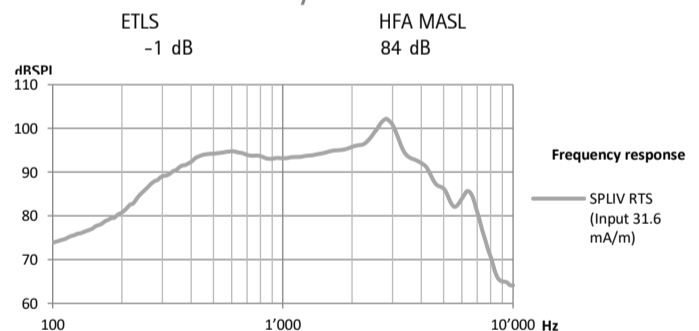

General test information

- Supply voltage 1.3 V / impedance 6.2 Ω
- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- Unless otherwise specified, all data obtained are measured with 5 mm tubing and Phonak Target measurement settings
- The 0.4 cm³ coupler data is used as additional information which is more close to the real application, as the deep insertion leads to a significantly smaller residual volume in front of the ear drum



Absolute Hearing Solutions LLC
absolutehearing@att.net

750 Cross Pointe Road Suite F
Gahanna, Ohio 43230

Phone: 614-452-4280
Toll Free: 888-803-2159
Fax: 614-577-0481

www.absolutehearingsolutions.com



Sonova AG · Laubisrütistrasse 28
CH-8712 Stäfa · Switzerland
www.phonak.com

