

# Phonak Bolero™ M

Technical Data




## Phonak Bolero M-PR (M90/M70/M50/M30)


### SlimTube HE 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014  
IEC 60118-0 : 2015

#### Output sound pressure level

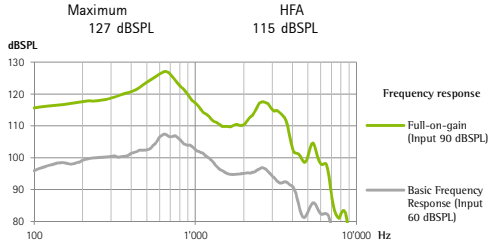

#### Acoustic gain

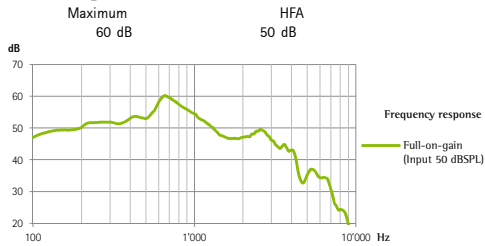


Frequency range	< 100 Hz - 7000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	1.0%	1.0%	2.0%	1.0%
Expected operating time*	18 h			
Equivalent input noise level	19 dB SPL			


### HE11 680 2 cm<sup>3</sup> coupler data

ANSI / ASA S3.22-2014  
IEC 60118-0 : 2015

#### Output sound pressure level

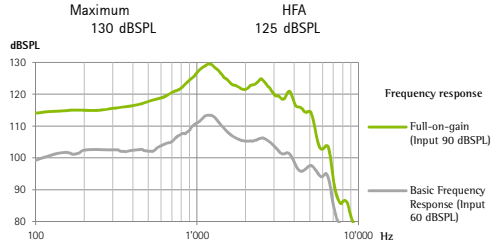

#### Acoustic gain

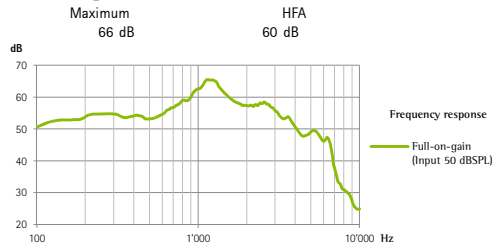

Frequency range	< 100 Hz - 6800 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	4.0%	3.0%	2.0%	1.0%
Expected operating time*	18 h			
Equivalent input noise level	19 dB SPL			

#### General test information

- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- All data obtained are measured with Phonak Target measurement settings

\* Expected operating time of the rechargeable battery depends on active features, the use of wireless accessories, hearing loss, battery age and sound environment.

**Warning:** Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted. Such changes may damage the ear or the hearing aid.

Call  
**Absolute Hearing Solutions**  
For Hearing Aid Details!  
614-452-4280

www.absolutehearingsolutions.com



0459

A Sonova brand

**PHONAK**  
life is on



Absolute Hearing Solutions LLC  
absolutehearing@att.net

750 Cross Pointe Road Suite F  
Gahanna, Ohio 43230

Phone: 614-452-4280  
Toll Free: 888-803-2159  
Fax: 614-577-0481

www.absolutehearingsolutions.com

Call

**Absolute Hearing Solutions**  
For Hearing Aid Details!

614-452-4280

www.absolutehearingsolutions.com