




Phonak Naída M-SP (M90/M70/M50/M30)


HE11 2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

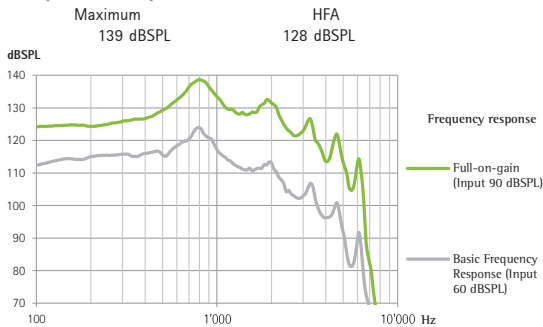


Acoustic gain

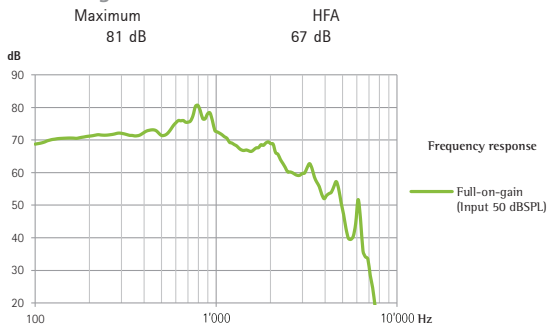

Frequency range	<100 Hz - >5000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	2.0%	1.0%	1.0%	1.0%
Battery current	2.1 mA			
Equivalent input noise level	19 dB SPL			


Induction coil sensitivity

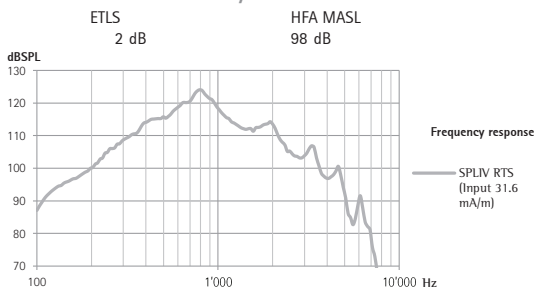


HE11 680 2 cm³ coupler data

ANSI / ASA S3.22-2014
IEC 60118-0 : 2015

Output sound pressure level

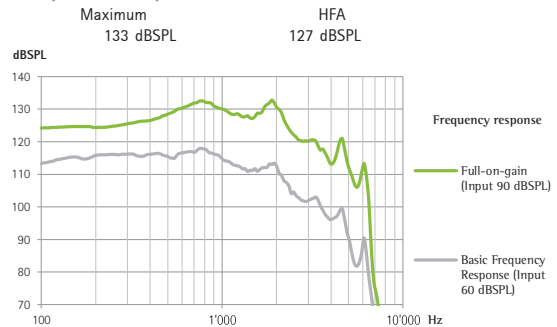


Acoustic gain

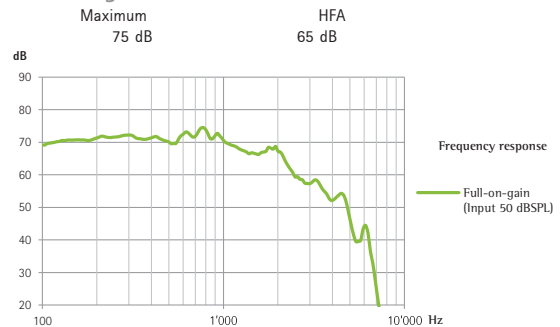

Frequency range	<100 Hz - >5000 Hz			
Total harmonic distortion	500 Hz	800 Hz	1600 Hz	3200 Hz
	2.0%	1.0%	1.0%	1.0%
Battery current	2.0 mA			
Equivalent input noise level	19 dB SPL			

Induction coil sensitivity

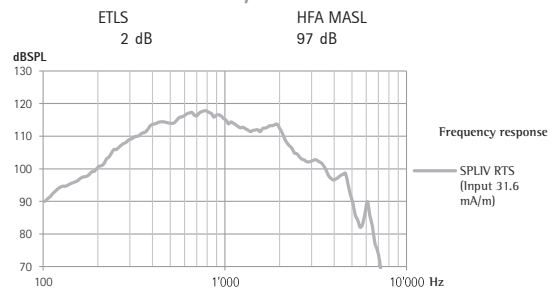

General test information

- Supply voltage 1.3 V / impedance 6.2 Ω.
- Specific measurement settings are used. RTS adjustment with volume control
- The device is operating in linear mode
- Low-level expansion is active
- All data obtained are measured with Phonak Target measurement settings

Warnings

- ⚠ This hearing instrument has an output sound pressure level that can exceed 132 dB SPL. Special care should be taken when fitting this instrument as there is a risk of impairing the residual hearing of the user.
- ⚠ Changes or modifications to the hearing aid that are not explicitly approved by the manufacturer are not permitted. Such changes may damage the ear or the hearing aid.



Sonova AG · Laubisrütistrasse 28
CH-8712 Stäfa · Switzerland

A Sonova brand

PHONAK
life is on