

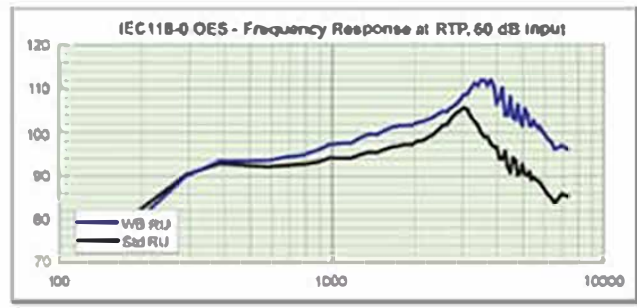
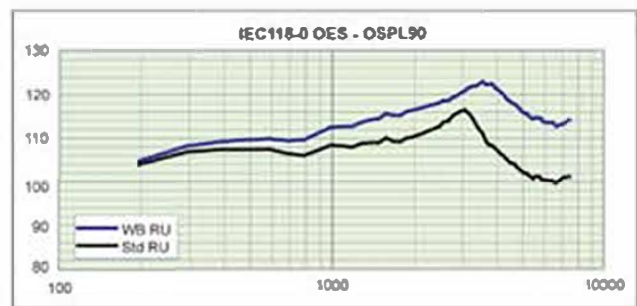


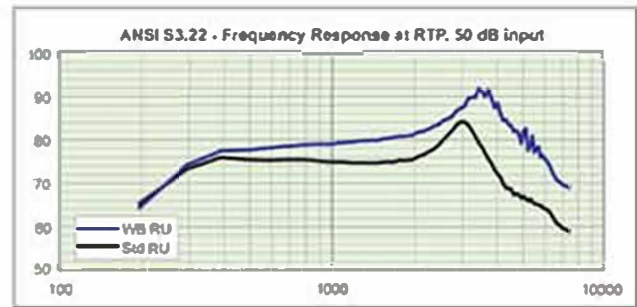

EP 550	Wideband RU
<b>ANSI S3.22-1996</b>	
Peak OSPL90 (dB SPL)	113.0
OSPL90 peak frequency (Hz)	3600
HFA OSPL90 (dB SPL)	106.8
HFA Full-on Gain (dB)	33.7
HFA Ref. Test Gain (dB)	29.8
F1 (Hz)	200
F2 (Hz)	8000
500Hz THD (%)	2.0
800Hz THD (%)	2.0
1600Hz THD (%)	2.0
Eq. Input Noise Level (dB SPL)	26.0
Battery Drain (mA)	1.25
Attack Time (msec)	9
Release Time (msec)	170
<b>IEC118-0 OES</b>	
Peak OSPL90 (dB SPL)	122.5
OSPL90 peak frequency (Hz)	3600
OSPL90 @ 1600 Hz (dB SPL)	115.2
FOG @ 1600 Hz (dB)	40.2
1000Hz THD (%)	2.0
Battery drain (mA)	1.20

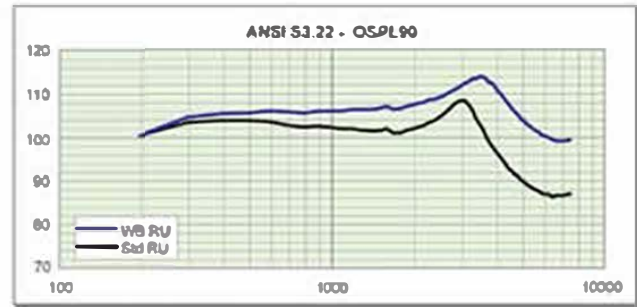

**Absolute Hearing Solutions LLC**  
 absolutehearing@att.net  
 750 Cross Pointe Road Suite F  
 Gahanna, Ohio 43230  
 Phone: 614-452-4280  
 Toll Free: 888-803-2159  
 Fax: 614-577-0481

www.absolutehearingsolutions.com



SOUNDS SO NATURAL | FEELS SO COMFORTABLE