

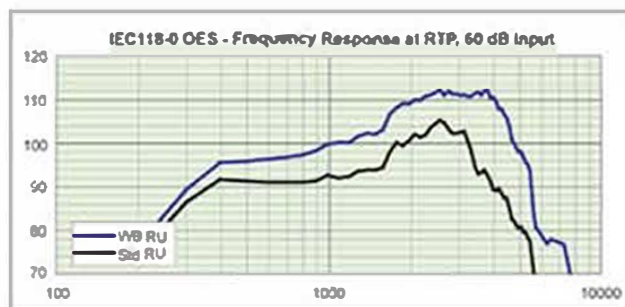
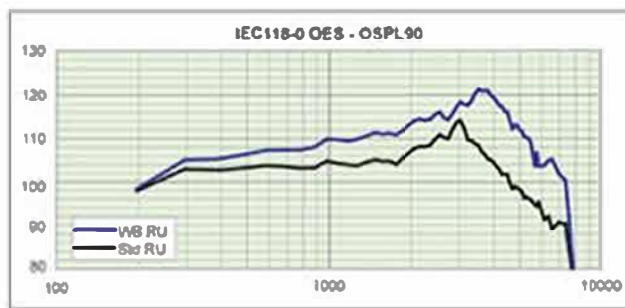


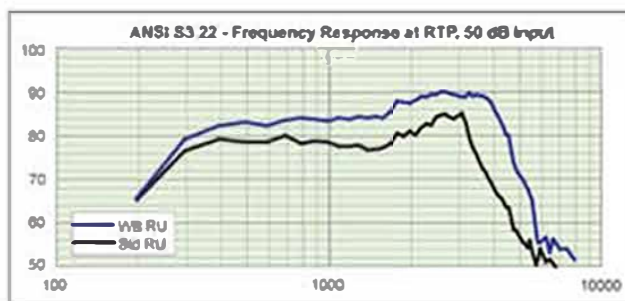

P 25	Wideband RU
ANSI S3.22-1996	
Peak OSPL90 (dB SPL)	110
OSPL90 peak frequency (Hz)	3600
HFA OSPL90 (dB SPL)	103
HFA Full-on Gain (dB)	41
HFA Ref. Test Gain (dB)	26
F1 (Hz)	200
F2 (Hz)	5700
500Hz THD (%)	2.0
800Hz THD (%)	2.0
1600Hz THD (%)	2.0
Eq. Input Noise Level (dB SPL)	31.0
Battery Drain (mA)	1.2
Attack Time (msec)	250
Release Time (msec)	170
IEC118-0 OES	
Peak OSPL90 (dB SPL)	123
OSPL90 peak frequency (Hz)	3600
OSPL90 @ 1600 Hz (dB SPL)	115
FOG @ 1600 Hz (dB)	40
1000Hz THD (%)	2.0
Battery drain (mA)	1.00

Call
Absolute Hearing Solutions
For Hearing Aid Deals
614-452-4280
www.absolutehearing solutions.com

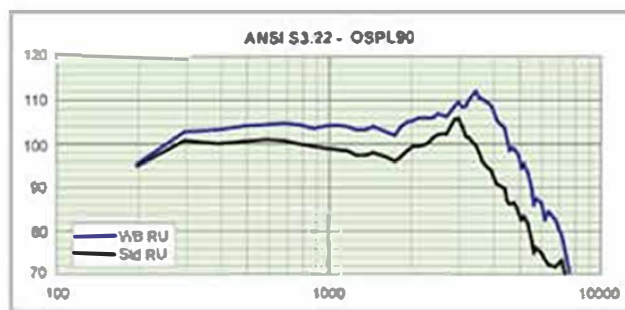

SOUNDS SO NATURAL | FEELS SO COMFORTABLE